


GRID  
2.54 X 2.54

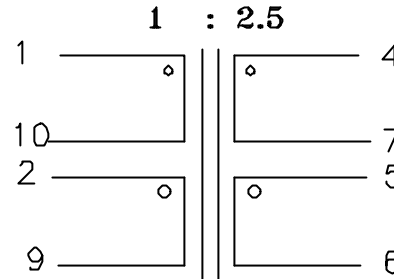

**ELECTRICAL CHARACTERISTICS:**  
(FOR AT&T T7250A, T7252A, T7254 ISDN S/T INTERFACE)

1. D.C.R. : 1-9(2-10 SHORT) = 2.80 OHM MAX.  
4-6(5-7 SHORT) = 6.0 OHM MAX.
2. INDUCTANCE(@ 1KHZ, 1 Vrms, W/H 2-10 SHORT)  
1-9 = 22mH MIN.
3. LEAKAGE INDUCTANCE(@10KHZ, 0.1 Vrms, W/H 5-7,4-6,2-10 SHORT) 1-9 = 18 uH MAX.
4. INTERWINDING CAPACTANCE(@ 10KHZ, 0.1 Vrms W/H 2-10, 5-7 SHORT) 2-5 = 25 PF MAX.
5. TURN RATIO(W/H 2-10, 5-7 SHORT) 4-6 : 1-9 = 2.5 : 1
6. HI-POT(@1K VAC, 1 mA, 1 Minute) 1-4, 1-5, 2-4, 2-5

						<b>Atech</b> <sup>®</sup> Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960	TITLE TRANSFORMER	
							DWG. NO. 2718AM	
A INDUCTANCE						UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						E159603		DRAW Pair